


FUNCTION. DESIGN. QUALITY.

## DEALER DISPLAY STAND Assembly Instructions

#### Assembled Dimensions: 2.25 ft. x 8.1 ft. Blanke Part No. 536-900-01



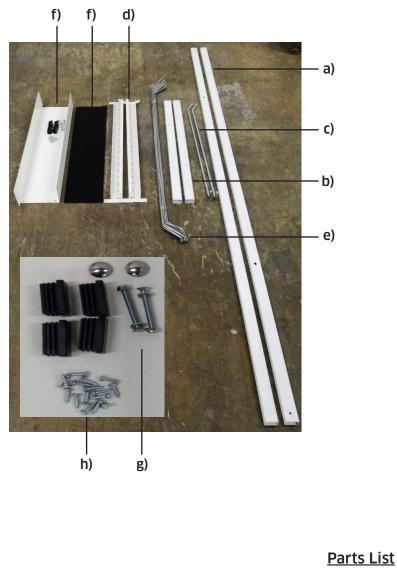

a) Side frames

- b) Feet
- c) Support beams
- d) Traverses
- e) Shelf hooks
- f) Base plate and mat
- g) Hardware (2 ea. head screws, nuts, washers), 4 end caps
- h) Sheet metal screws



# Assembly Instructions

## 1. Frame

Attach the two side frames and the two feet using the head screws, nuts, and washers.

### 2. Traverses

Attach the two traverse pieces to the top and middle of the frame by using the sheet metal screws. Make sure that the row of holes in the upper traverse are pointing upward and the row of holes in the lower traverse are pointing downward.

#### 3. Support Beams

Insert the two support beams into the assembled left foot and frame and right foot and frame respectively.

### 4. Base Plate

Install the base plate between the feet of the rack using the sheet metal screws.

5. Shelf Hooks Insert the 17 shelf hooks into the upper and lower traverse holes.

NOTE: Assembled rack will have 15 spaces for different trims to be displayed to your preference.

Illustrations may vary. Technical changes and color deviations may occur from display to display.





Additional Images

<- Upper and lower traverse

> Assembled shelf hooks ->

